

MATERIALS AND COLORS

STEPS

- Solid beech wood, 40 mm thickness
- No knots or splits, maximum stability and mechanical strength thanks to Finger Joint technology
- Non-toxic water-based coating: 3 layers of paint

HANDRAIL

- In solid beech wood in same color as steps


STRUCTURE

- Steel modular elements
- Powder coated with matt scratch proof finish

RAILING (two models)

- Steel vertical columns painted in the same color as the structure (distance between the columns less than 10 cm)
- Painted steel uprights in same color as structure and satin finish horizontal stainless steel cables

Wood colors (steps and handrail)




Steel colors (structure and railing)




CONFIGURATIONS


STRAIGHT

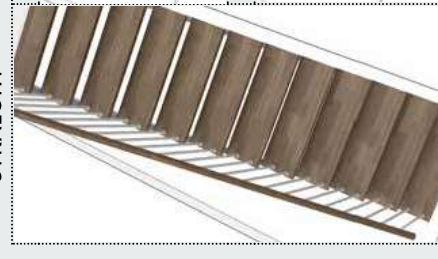

WITH 1 TURN

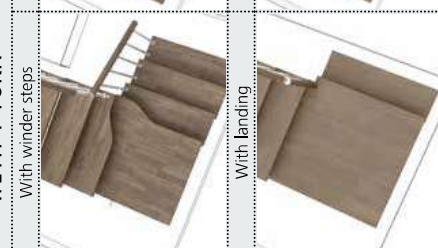


WITH 2 TURNS

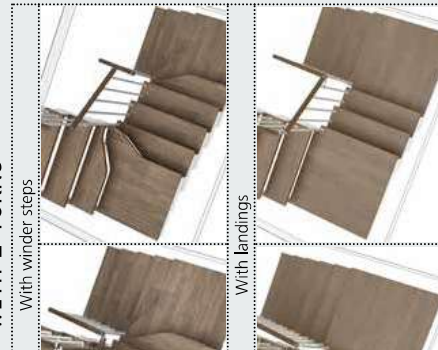

PACKAGE

1 box =



The measures of the box may vary

1 complete staircase with 12 steps

Structure, steps, railing (internal side), handrail

Choose between:

Straight staircase:

- 12 straight steps
- 9 straight steps + 3 winder steps (2 versions)
- 11 straight steps + 1 landing


Staircase with 2 turns:

- 6 straight steps + 6 winder steps (2 versions)
- 10 straight steps + 2 landings

MEASUREMENTS valid for all the configurations

The **SYSTEM FOR ADJUSTING THE HEIGHT BETWEEN THE STEPS (RISE)** allows you to:

- Obtain different heights between floors with the same number of steps.
- Obtain the height between the floors as required with more or fewer steps (this means you can find the best compromise between the step height and the space occupied by the staircase).

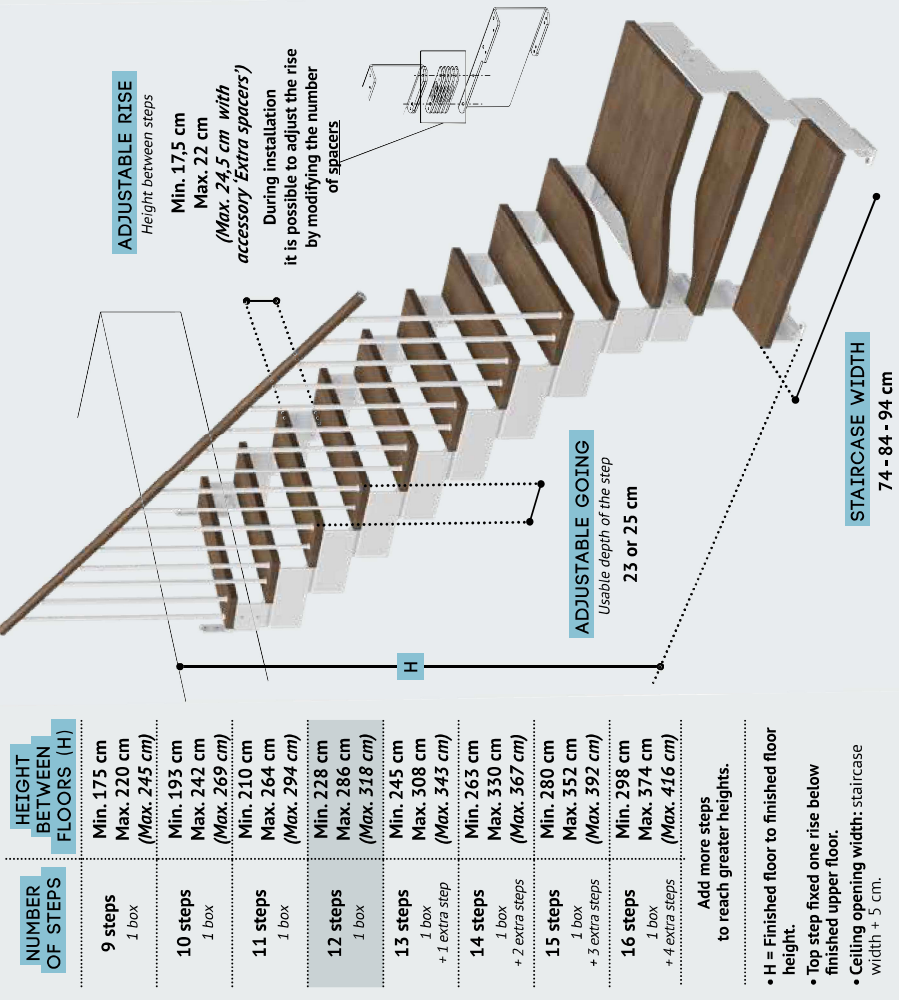

NUMBER OF STEPS	HEIGHT BETWEEN FLOORS (H)
9 steps 1 box	Min. 17,5 cm Max. 220 cm (Max. 245 cm)
10 steps 1 box	Min. 19,5 cm Max. 242 cm (Max. 269 cm)
11 steps 1 box	Min. 21,0 cm Max. 264 cm (Max. 294 cm)
12 steps 1 box	Min. 22,8 cm Max. 286 cm (Max. 318 cm)
13 steps 1 box + 1 extra step	Min. 24,5 cm Max. 308 cm (Max. 343 cm)
14 steps 1 box + 2 extra steps	Min. 26,5 cm Max. 330 cm (Max. 367 cm)
15 steps 1 box + 3 extra steps	Min. 28,0 cm Max. 352 cm (Max. 392 cm)
16 steps 1 box + 4 extra steps	Min. 29,8 cm Max. 374 cm (Max. 416 cm)

Add more steps to reach greater heights.


- H = Finished floor to finished floor height.
- Top step fixed one rise below finished upper floor.
- Ceiling opening width: staircase width + 5 cm.

DIRECTION OF ASCENT

Clockwise



Counter clockwise



TURN POSITION

Bottom



Middle




Top



ACCESSORIES

Extra step (with structure and railing).



Railing for 3 steps (External side).



Balustrade for upper floor (100 cm).



Extra spacers (to reach the max rise of 24,5 cm).



Safety bars under steps (wood lisle) (steps and platform - no for winder steps).

